



THERMOGAUGE 12V

USER'S MANUAL

PLEASE FOLLOW THE CONNECTION DIAGRAMS BELOW:

FIGURE 1 THE 12V THERMOGAUGE

FIGURE 2 HOW TO CONNECT TO PRODUCT


FIGURE 3 HOW TO CONNECT TO BATTERY HARNESS

FIGURE 4 HOW TO PAIR YOUR THERMOGAUGE

HOW TO CONNECT TO PRODUCT

- LOCATE PLUGS INSIDE OF WEARERS LEFT LOWER POCKET
- NOTE: ON A JACKET OR VEST THESE PLUGS WILL BE IN THE POWER POCKET INSIDE OF THE PRODUCT. ON A PANT IT WILL BE IN THE UPPER LEFT HIP POCKET
- OPEN POCKET AND PULL OUT PLUGS
- PLUG THE FEMALE PLUGS FROM THE THERMOGAUGE (SEE FIGURE 1 & 2) INTO THE MALE PLUGS FROM PRODUCT, ASSURE THAT THE PLUGS ARE SECURE


FIGURE 2. HOW TO CONNECT TO PRODUCT

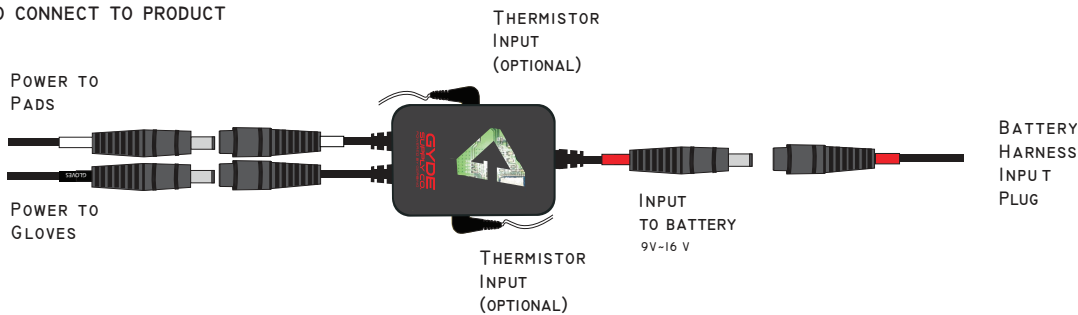

HOW TO CONNECT TO BATTERY HARNESS

- ON THE OPPOSING SIDE THERE WILL BE A MALE PLUG LOCATE IT (SEE FIGURE 1)
- PLUG THAT PLUG INTO THE BATTERIES RECEIVING JACK ON THE BATTERY HARNESS FROM MOTORCYCLE BATTERY (SEE FIGURE 3)
- ONCE PLUGGED IN THE THERMOGAUGE WILL ILLUMINATE SHOWING IT HAS RECEIVED POWER AND IS WAITING ON THE PAIRING PROCESS

FIGURE 3. HOW TO CONNECT TO BATTERY HARNESS

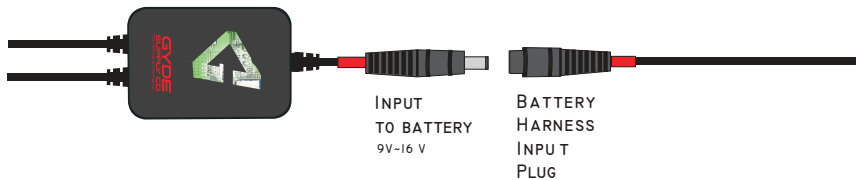


NOTE:

- DO NOT APPLY MORE THAN 16V TO INPUT
- DO NOT LOAD MORE THAN 12 AMPS TO EACH CHANNEL

PAIRING YOUR THERMOGAUGE

- NOTE: THIS STEP WILL NEED TO BE COMPLETED AFTER YOU HAVE ALREADY DOWNLOADED THE APP
- ONCE THE THERMOGAUGE HAS INDICATED IT IS READY TO BE PAIRED BY ILLUMINATING
- LOCATE THE PAIRING PAGE, ON MOST DEVICES THE APP WILL AUTOMATICALLY PAIR, FOR THOSE THAT DON'T PAIR AUTOMATICALLY PRESS "SCAN" ON THE GYDE SYNC PAGE
- REVIEW FOUND BLUETOOTH DEVICES AND CHOOSE THE ONE FOR THE GYDE PRODUCT IT WILL DISPLAY "CONNECTING" ONCE CONNECTED IT WILL REFRESH AND DISPLAY "CONNECTED"
- IF YOU ARE PAIRING TWO DEVICES REPEAT STEP ABOVE
- IF YOUR PRODUCT HAS THERMISTORS YOU CAN PLUG THOSE IN GIVING YOU TEMPERATURE FEEDBACK AND CONTROL

FIGURE 1. 12V THERMOGAUGE

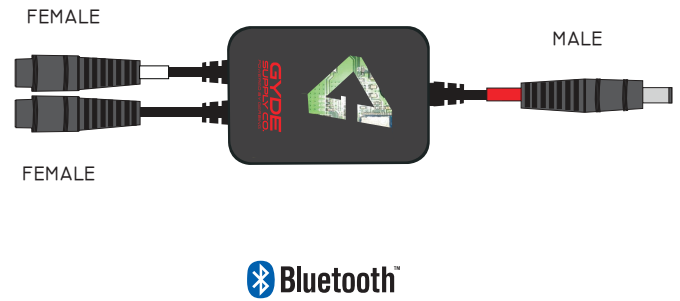

SEARCH FOR: GYDE THERMOGAUGE

FIGURE 4. PAIRING YOUR THERMOGAUGE

